


**ZEPPELIN**<sup>®</sup>  
*the power of the land*

**GRADA DE DISCOS  
SUSPENDIDAS  
EN X y V**

FICHA PRODUCTO

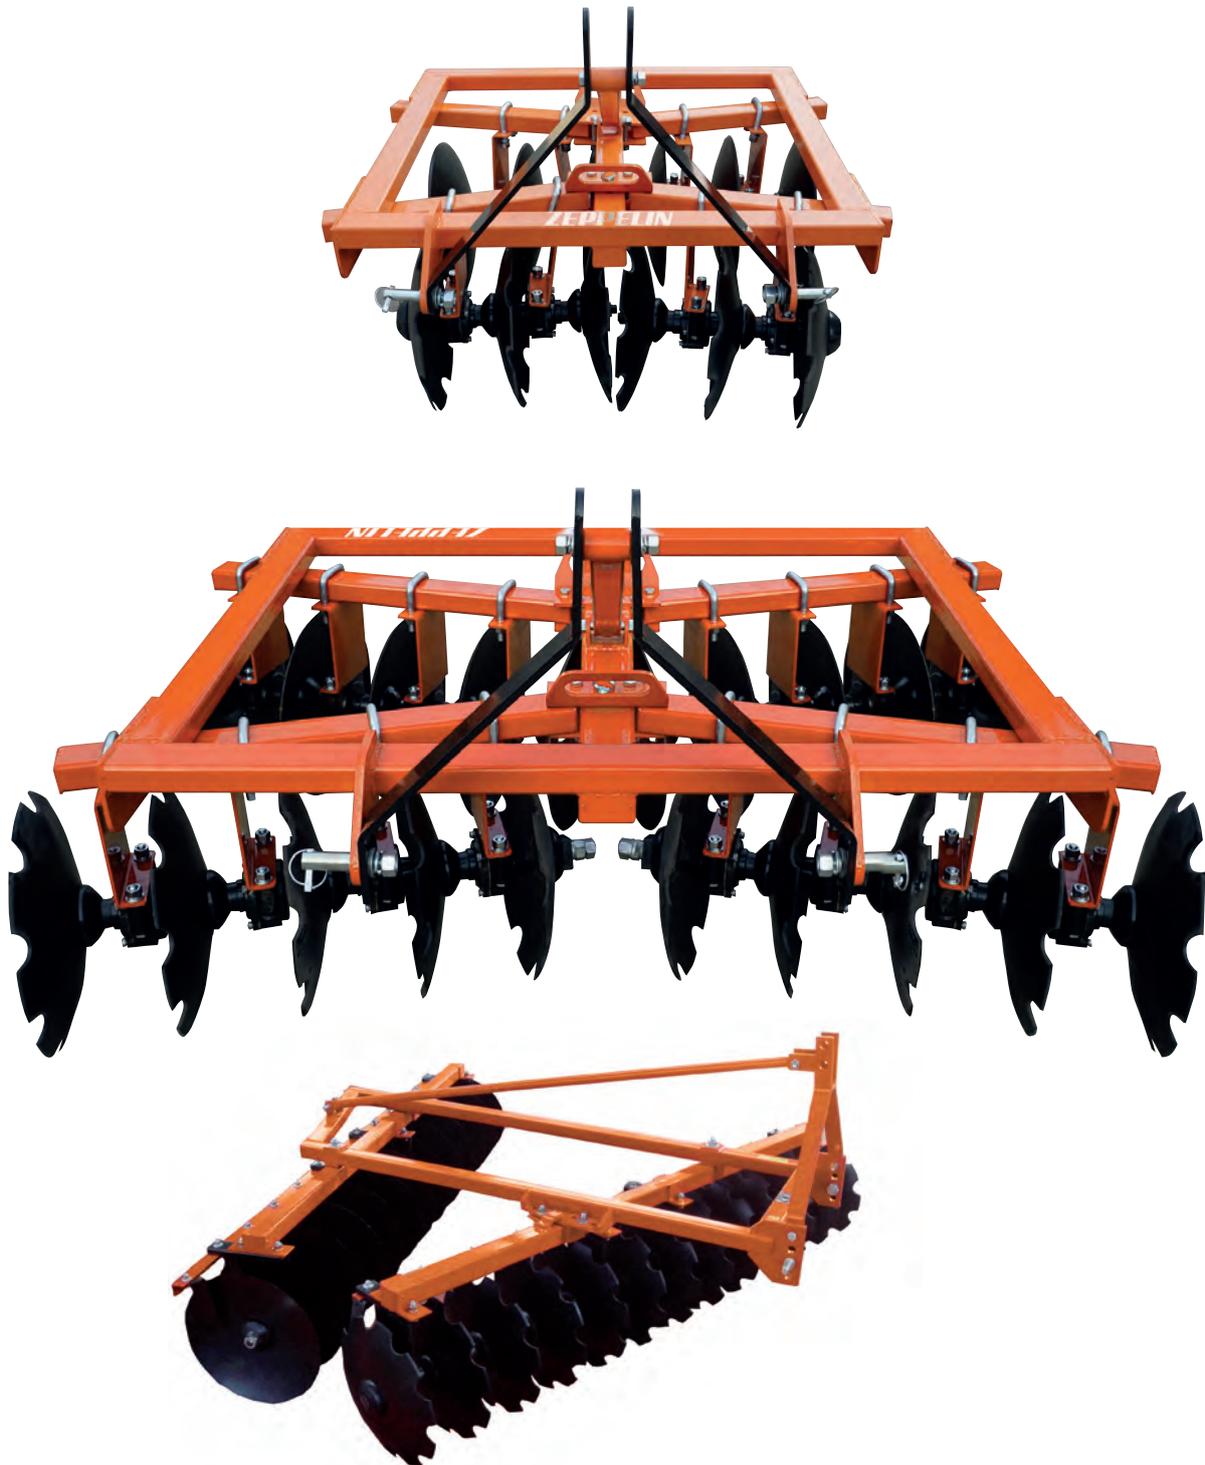

## GRADA DE DISCOS SUSPENDIDAS EN X y V

FICHA PRODUCTO



### GRADA EN X

| Referencia | Discos en: | Kg  |  mm |  mm |  |  Ø mm |  Ø'' |  Cat. |  hp |
|------------|------------|-----|---|---|--|---|--|---|---|
| ESGRADA12Z | X          | 260 | 1100  | 160   | 12   | 450   | 18   | 1°  | 15-30   |
| ESGRADA16Z | X          | 330 | 1400  | 160   | 16   | 450   | 18   | 1°  | 25-35   |
| ESGRADA20Z | X          | 410 | 1700  | 160   | 20   | 450   | 18   | 2°  | 40-55   |



### GRADA EN V

| Referencia   | Discos en: | Kg  |  mm |  mm |  |  Ø mm |  Ø'' |  Cat. |  hp |
|--------------|------------|-----|--|--|---|--|---|--|--|
| ESGRADA12Z20 | V          | 324 | 1400   | 160  | 12  | 510  | 20  | 1-2°   | 40   |
| ESGRADA16Z20 | V          | 390 | 1800   | 160  | 16  | 510  | 20  | 1-2°   | 45   |
| ESGRADA20Z20 | V          | 463 | 2200   | 160  | 20  | 510  | 20  | 1-2°   | 55-65  |
| ESGRADA16ZR  | V          | 430 | 1900   | 160  | 16  | 560  | 22  | 1-2°   | 55-65  |
| ESGRADA20ZR  | V          | 480 | 2200   | 160  | 20  | 560  | 22  | 1-2°   | 55-65  |

## GRADA DE DISCOS SUSPENDIDAS EN X y V

FICHA PRODUCTO

Actúa como procesadora de residuos antes del cultivo.

Rotura de superficies endurecidas impermeables y del terreno después del cultivo.

Alisamiento del terreno y preservación de la humedad del suelo.

Gran capacidad de penetración.



Discos dentados.



Discos lisos.